


New products



Lens mount 25 mm beam height
(like our mirror mounts)

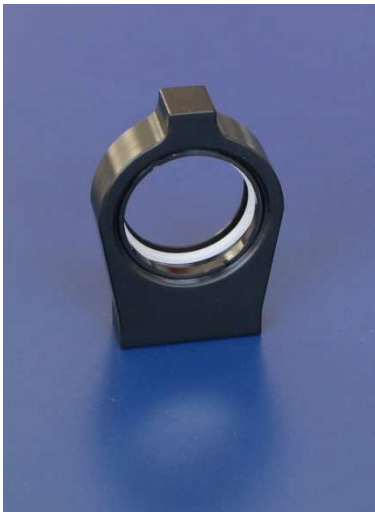

Mirror mount with lens insert for 1 inch
with auger thread to modify the focus manually
(also for MDI und MDI HS)



Cube holder



Mirror mount with 360° circle reverse control




Photodiode with amplifier




Variable AOM mount



Mounting screw with ball, which is under spring tension to pre-adjust the post height

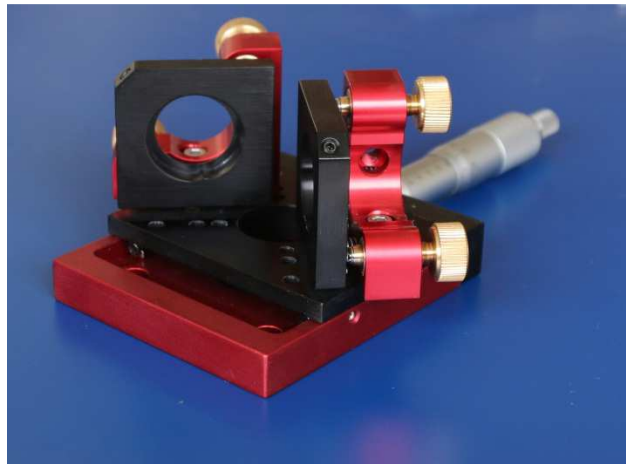

Variable Delay-Line with 2 mirror mounts

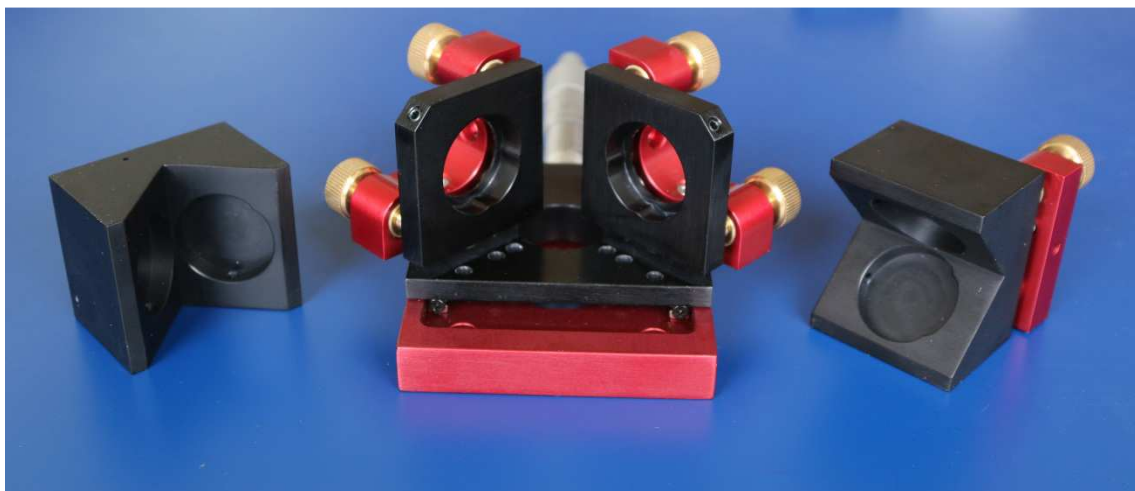

Variable Delay-Line with 2 mirror mounts, one constant 360° circle reverse control and one 360° circle reverse control with mirror mount, also motorized with PiezoMike